


## PANEL CONNECTORS

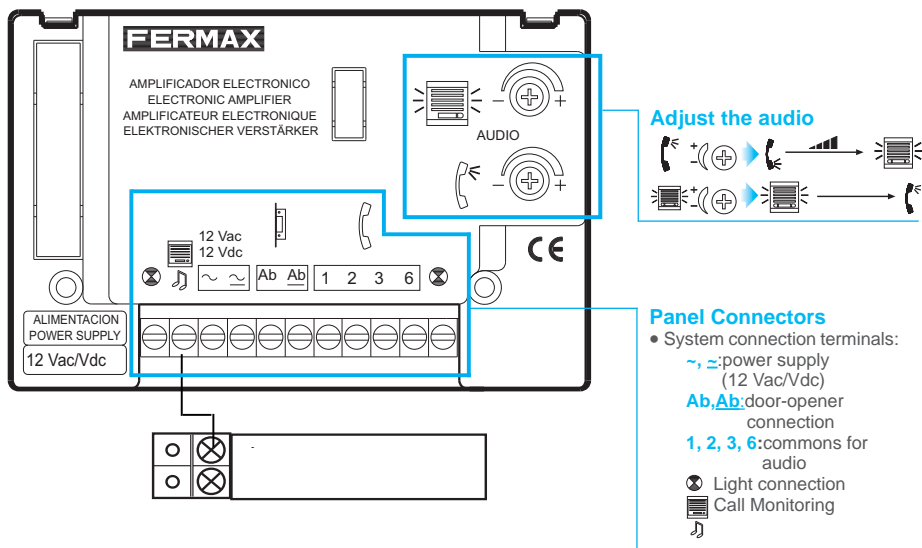

## TECHNICAL FEATURES

### OUTDOOR PANEL


<b>Power Supply</b>	12 Vac / 12 Vdc
<b>Consumption</b>	
in standby	40 mA
audio active	250 mA
lighting	70 mA
<b>Temperatura de funcionamiento</b>	[-25°C, +70°C] / [-13°F, +158°F]
<b>Audio power from the apartment to the panel</b>	1W
<b>Audio power from the panel to the apartment</b>	0,15 W
<b>Adjustable volume both ways</b>	

### TELEPHONE

<b>Operating Temperature</b>	[5, +40°C] / [41, +104°F]
<b>Electronic call</b>	8, 12 Vpp
<b>Speaker</b>	1.75" 16 W
<b>Microphone: Electret. Dinamic Resistance 50</b>	

 **WIRING DIAGRAM**

WIRING DIAGRAM KIT 2L - 24L

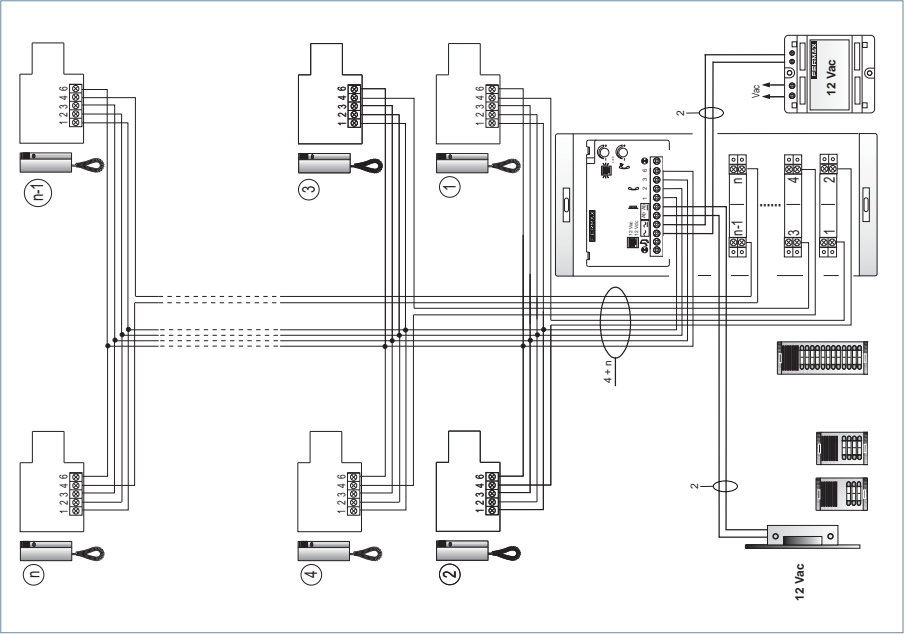

WIRING DIAGRAM KIT 1L

