

Double Back Box

TYPICAL APPLICATIONS

Combining two separate door entry single-gang devices into one housing

EASY INSTALLATION

Surface mounting

Multiple cables now route to just one point

SPECIAL FEATURES

Removeable central bridge plate

Spacer included to optimise device height



Back box is shown with HID iCLASS reader and Smart R break-glass unit with optional tamperproof cover

Entry system installations often require both an exit button and a break glass unit at each controlled door with both units usually wired back to the same point. This surface-mount double back-box simplifies installation by allowing both units to be fitted into one housing to create a more aesthetically-pleasing appearance and saving on installation time by allowing multiple cables to be routed to just one point.


The double back box is also ideal for other single-gang compatible devices such as access control card readers and traffic-light indicators.

The central bridge is removeable to allow easy routing of wires between units during installation.

A spacer is included to increase the profile of one device if required.



- **Surface Mounting**
- **Suitable for both vertical and horizontal positioning**
- **Enhances the appearance of the installation**
- **Houses two UK single-gang compatible devices**

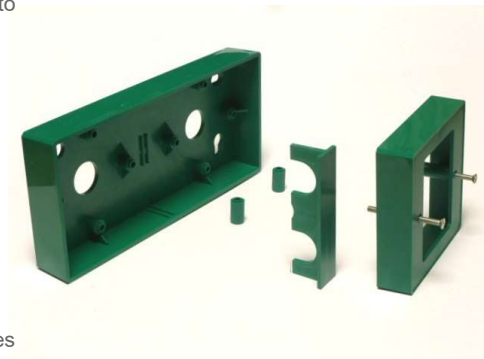

Specifications

Part Number:	SR1-DH-G
Colour:	Green
Spacers Included:	1
Exit Devices:	None (supplied unpopulated)
Material:	Plastic
Dimensions (L x W x D):	189mm x 87mm x 26mm (without spacer) 189mm x 87mm x 47mm (with spacer)
Net Weight:	130 g (approximate)

SMARTR
D I S T R I B U T I O N

Smart R Distribution Limited
Smart R House, Moonhall Business Park
Helions Bumpstead Road, Haverhill, Suffolk
CB9 7AA. England
Email: info@smartRdistribution.com
Web: www.smartRdistribution.com
Tel: +44 (0)1440 704 387