



Scan the QR code or link to the address below to find a list of datasheets to all products and other support information.

<https://www.tm-readers.com/downloads.htm>



Overview

With a similar footprint to the RX1, the RX1K is designed to fit directly to a UK or EU electrical back box. It also features an RGB illuminated keypad, offering the additional security of PIN entry. This powerfully secure reader supports a wide variety of output formats, allowing it to be used in most access control systems.

The combination of an integral speaker, RGB LED and audible buzzer provides a flexible platform to give the right user interface configuration for your project.



Mechanical

Dimensions	87 x 87 x 21 mm (3.4 x 3.4 x 0.8 inches)
Housing	Moulded polycarbonate
Mounting	Suitable plain surface
Fixing	4mm., max' diameter + UK / EU electrical back box



Environmental

Operating temp'	-35°C to +66°C
Humidity	85±5% at 30±2°C (86±3°F)
Ingress	IP67
Impact	IK10
Flammability	UL94V-0



Electrical

Voltage	see table below
Current	see table below
Data Voltage	Rest >4Vdc / Active <1Vdc
Data output	see table below
Indication	1 RGB LED + RGB LED illuminated keypad
Sounder	Integral speaker
Termination	screw terminal connection block




Reader Models are sold as customer-specific configurations.

Please call +44 (0) 1495 751 992 to discuss your custom configuration or LEGIC® reader requirements.

* READER MODEL	Frequency	Current mA	Voltage Vdc	Technology	Keypad output	Optical tamper	Wiegand Clock & Data	OSDP	FCC	UL294
RX1K00	125 kHz	115	5 - 12	125kHz EM variants	4 bit		•			
RX1K80PLUS	13.56 MHz 125 kHz	200	5 - 12	MIFARE® Sector + 125kHz	4 bit		•		•	•
RX1K90B	13.56 MHz 125 kHz 2.4 GHz	100	10 - 16	MIFARE®DESFire® LEGIC® + 125kHz Bluetooth® ready	4bit	•	•	•	•	•

* certifications not available to all reader models.

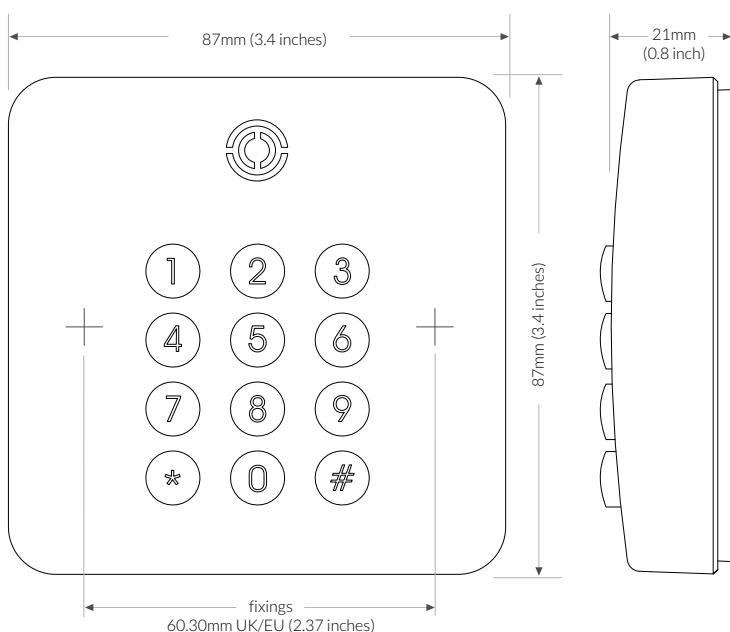

The **RX1K** reader offers a choice of technologies, and a range of security levels from 125kHz through MIFARE®Sector and LEGIC® encryption multiple technology access control ... all the way up to a **high-end** security level option using the **RX1K90B** reader model, with the added security of PIN keypad entry.

The **RX1K90B** boasts multiple technologies embedded in its hardware and firmware, providing a 13.56MHz MIFARE®DESFire® platform, having state-of-the-art security and privacy. The reader employs LEGIC® 13.56MHz contactless smart technology, with its tightly integrated LEGIC RF Standard. In addition, the reader can also be used for 125kHz access control systems, including other widely used 125kHz technologies such as:

- KANTECH
- FARPOINTE
- AWID
- CASI
- EM variants

Key features

- Multi-technology
- UK design and manufacture
- Black high gloss finish
- Slim profile
- RGB LED
- RGB LED illuminated keypad
- Fully encapsulated electronics
- PIN authentication
- Optical tamper switch (see table above)
- Wide range of output formats
- Read range up to 10cm (4 inches)
- 1 year limited warranty
- Wall spacer (optional extra)
- Back box (optional extra)



All copyrights © and trademarks ® / ™ are acknowledged and remain the property of their respective owners.

The Bluetooth word, mark and logo are registered trademarks of Bluetooth SIG, Inc. 'MIFARE', 'MIFARE Classic' and 'MIFARE DESFire' are trademarks of NXP B.V.